

CAT5E_CU_U004_305_PE

Spacetronek BC CAT5E AWG24 U/UTP ISO11801 PVC+PE Fca POE



Physical properties:

Conductor: Bare copper, solid AWG 24/1
 Total number of insulated conductors: 8, twisted in 4 pairs
 Color code: Blue-white, orange-white, green-white, brown-white
 Individual pair shielding: None
 Overall shielding: None
 Outer sheath: PVC+PE
 Outer sheath diameter (nominal): 0.50 mm nominal

Mechanical properties:


Tensile loading: 150N max.
 Shipping- and storage temperature range: -20 °C up to +75 °C
 Operating temperature range: -20 °C up to +60 °C
 Installation temperature range: 0 °C up to +50 °C
 Overall diameter Simplex (nominal): 4.7 mm nominal

Electrical properties:

Impedance: 100±5 Ohm @ 1-600 MHz
 Capacitance: 40 pF/m nominal @ 800 Hz
 Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
 Insulation resistance: 5 GOhm x km min.
 DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
 Voltage resistance: 72 Vdc max.
 Signal propagation delay: 535 nS/100 m max.
 Propagation delay: 20 nS/100 m max.
 NVP: 69%

General specification:

Category: CAT5E
 Cable structure: U/UTP
 Conductor: 24AWG 1/0.5BC
 Insulation: HD-PE
 Jacket: PVC+PE
 OD: 5.3±0.2mm
 CPR Class: Fca
 Color: Light gray RAL7035

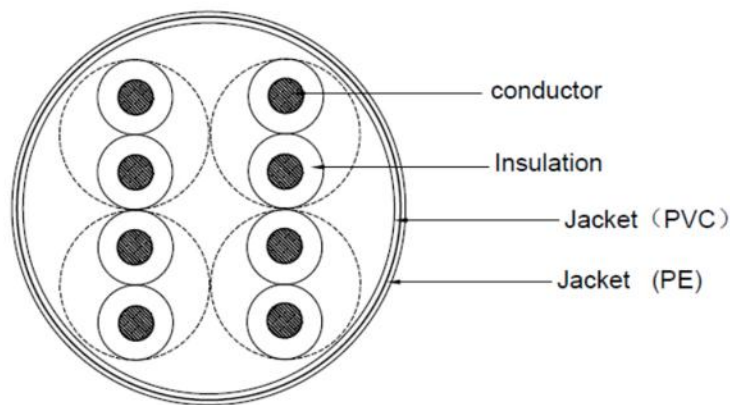


Deklaracja właściwości użytkowych

Hereby DMTrade Mikołaj Tomaszewski declares under our sole responsibility that cables are in conformity with following directives: EMC (2014/30/EU), RoHS (2011/65/EU + 2015/863/EU). Full document (declaration of conformity) is available for download from www.dmtrade.pl.

Niniejszym DMTrade Mikołaj Tomaszewski oświadcza, że kable są zgodne z zasadniczymi wymaganiami oraz innymi stosownymi postanowieniami poniżej wymienionych dyrektyw: EMC (2014/30/UE), RoHS (2011/65/UE + 2015/863/UE). Pełna deklaracja zgodności CE znajduje się na stronie www.dmtrade.pl.

EN 50581:2012; IEC 62321-4:2013 + A1:2017
 IEC 62321-5:2013; IEC 62321-6:2015;
 IEC 62321-7-1:2015; IEC62321-7-2:2017;
 IEC 62321-8:2017;



Owner - Mikołaj Tomaszewski

ISO11801 Fluke Channel Test @ 90m + PoE Fluke Channel Test @ 90m ISO11801 Class D + PoE

